

Platinum HD-TVI Bullet Camera


CMHR6232

LTS HD-TVI technology features high definition wired solutions combined with our upgraded network viewing software, NVMS7000. This DVR offers maximum reliability and quality that is perfectly scalable to meet your project needs. With the full support of analog, HD-TVI, and IP camera compatibility, we help minimize installation time.



HD-TVI CAMERA


Key Features:



Great for indoor/outdoor installation with reliable technology and resolution for 24/7 video monitoring

Specifications:

CAMERA	
Image Sensor	1 / 3" Sensor
Signal System	NTSC / PAL(Euro Version)
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @ (F1.2, AGC ON),0 Lux with IR
Shutter Speed	NTSC: 1/30 s(PAL: 1/25 s) to 1/50,000 s
Lens	3.6mm Angle of view: 76.88°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC:720p@30fps/ PAL: 720p@25fps
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB
GENERAL	
Working Temperature /Humidity	-40 °F - 140 °F (-20 °C - 60 °C) Humidity 90% or less (non-condensing)
Power Supply	12V DC
Power Consumption	Max. 3.5W
Weather Proof Ratings	IP66
IR Range	Up to 65ft(20m)
Dimensions	φ2.8" × 5.9"(φ70.0 × 149.5 mm)
Weight	0.8lb(360g)

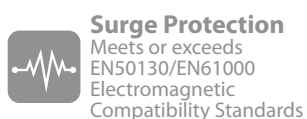



Explore Our Full Potential:



HD-TVI CAMERA

 www.youtube.com/user/LTSCCTV

Outline Dimensions:

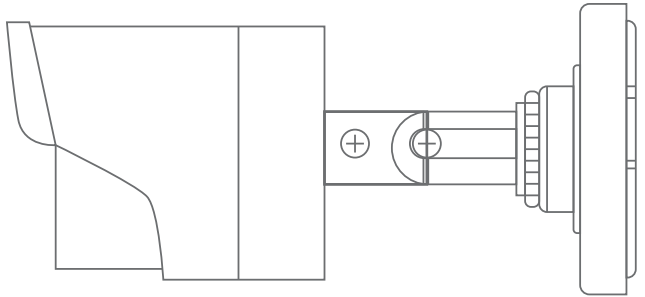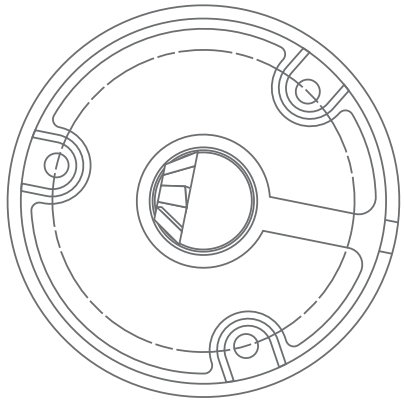

©2015 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.

